

# PRODUCT DATA SHEET

**AuLED20/502304**

**Item no.: 592-502-304**

## // TECHNICAL DATA

Operating voltage	230 V AC
Frequency	50/60 Hz
Rated output	2 x 30 W
Ambient temp.	-10°C - max. 40°C
System of protection	IP67
Protection class	SK I
Weight	2,65 kg
Protective glass plate	ESG, satin finish
Lamp housing	Aluminium, anodized
Type of lighting	Built-in lamp



## // LIGHT SOURCES INCL. BALLAST

Number of LEDs	2 x 60
Lifetime	> 50.000 h
Colour rendering	Ra > 80
Luminous flux	2 x 3360 lm
Light output	112 lm / W
Light colour	5000 K
Energy efficiency class	E
(acc. EU-regulation 2019/2015)	

## // ELECTRICAL CONNECTION

Type of connection	Flange plug M12 x 1; S-coded; 3-pole + PE
Pin assignment	Pin1: (+) L; Pin2: n.c.; Pin3 N; Pin4: PE

## // STANDARDS



EN 55015:2016-04 | EN 60598-1:2018-09 | EN 6100-4-4:2013-04 | EN 6100-4-2:2009-12 | EN 62031:2020-08 | EN 61000-4-5:2015-03 |  
 EN 61000-3-3:2014-03 | EN 61000-3-2:2015-03 | UL 1589

# PRODUCT DATA SHEET

**AuLED20/502304**

**Item no.: 592-502-304**

## // TECHNICAL DRAWING

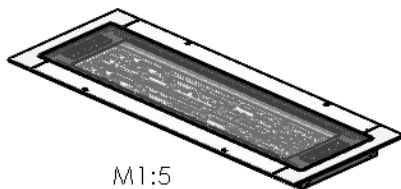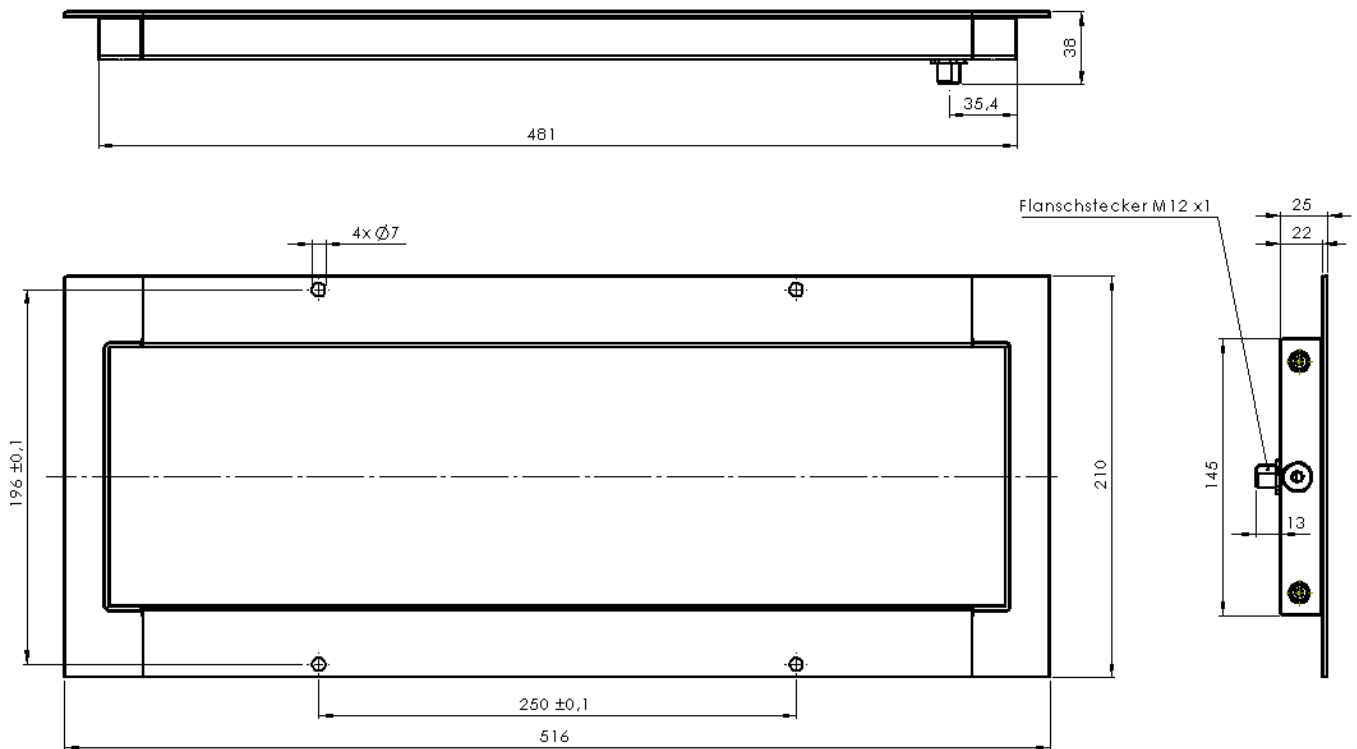

Note: Information on general considerations and the technology regarding earthing and wiring for Reduction of system faults can be found in IEC 61000-5-1 or IEC 61000-5-2.  
Changes to technical data reserved. Pictures may differ from the original.